


TECHNICAL DATA

U_{max}	27.7 V	$T_{hot}=25^{\circ}C$ Vacuum
Q_{max}	106.3 W	
ΔT_{max}	72°	
I_{max}	6.5 A	
ACR at 25°C	3.8 Ohm	
Pad type	Hot side	Ceramics Al_2O_3 , white 96%
	Cold side	
Max. processing temperature	Depends on chosen solder type	
Standard tolerances for thermal and electrical parameters $\pm 10\%$		

MODULE DRAWING
standard design

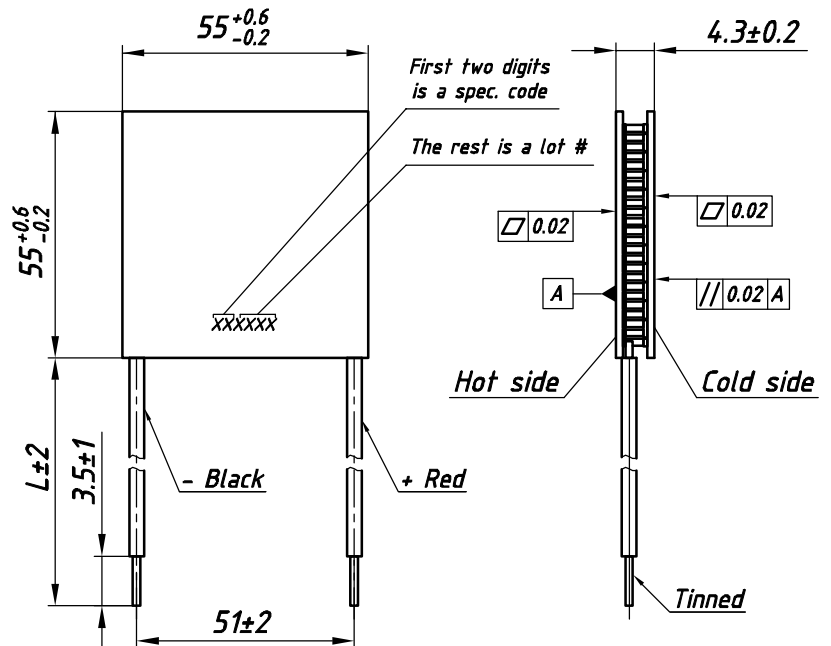

STANDARD ORDERING OPTIONS

Nº	Option	Parameter
1	Lead wires	AWG Nº
		18 20 22
		L - under customer request
3	Lead wires insulation	Type / Max. processing temp.
		Without insulation / See solder type m.p.t
		PVC-1 / 85° C
		PVC-2 / 105° C
		Silicone / 180° C
4	Internal solder	Type / Max. processing temp.
		Type-1 / 138° C
		Type-2 / 183° C *
		Type-3 / 227° C
5	Anticorrosional coating	yes no
		Type / Max. processing temp.
6	Sealing	Without sealing / 200° C
		Epoxy / 130° C
		Silicone / 180° C

AVAILABLE MODIFICATIONS

Design	Description
TM-241-1.4-6.0 M	High reliable version on cold side
TM-241-1.4-6.0 MM	High reliable version on both sides

OPTIONS UPON REQUEST

Height tolerance	± 0.02
Unflatness and nonparallelism	± 0.02
Porch-style design	

- Solder type marked * is not compliant to RoHS (2002/95/EC)
- For another options consult of our technical support engineers

Ferrotec Nord Corp.
www.ferrotec-nord.com
e-mail: info@ferrotec-nord.com
phone: +7 (499) 357-67-71
Peschany Carrier 3, 109383 Moscow, Russia

Performance graphs for TM-241-1.4-6.0 module at Th=25 °C
 Environment: vacuum

